

RS 3061 CJ

Water-cooled high- μ triode

110 kW

- Output power:
110 kW in CW mode
- Anode voltage: 15 kV
- Anode dissipation: 50 kW max.
- Frequency up to 100 MHz



THALES



RS 3061 CJ

The RS 3061 CJ is a RF power high-amplification factor triode designed specifically for industrial applications. This tube uses a coaxial design and metal-ceramic technology. This triode is designed to operate in CW mode. For operation in pulse mode, the parameters

depend on each equipment characteristics, contact us for specific information.

The RS 3061 CJ is a water-cooled triode.

This product is designed, developed and manufactured at an ISO 9001 production site registered.

Electrical characteristics

Filament	thoriated tungsten		
Filament voltage (+ 5 %, - 10 %)	10	V	
Filament current	190	A	
Surge current	570	A	max.
Capacitance:			
• grid-anode	48	pF	
• grid-cathode	100	pF	
• cathode-anode (1)	0.7	pF	
Amplification factor	100		approx.
Transconductance (Va: 10 kV, Ia: 4 A)	100	mA/V	approx.

Mechanical Characteristics

Operating position	vertical, anode up or down		
Weight	7.5	kg	approx.
Dimensions	see outline drawing		

Maximum ratings

Frequency (2)	30	MHz
Anode voltage	15	kV
Control-grid voltage	- 800	V
Control-grid current (F < 30 MHz):		
• at full load, CW	4.2	A
• at no load, CW	5.3	A
Peak cathode current, CW	80	A
Anode dissipation	50	kW
Grid dissipation	2.2	kW
Grid resistance (at blocked tube)	4	kΩ

(1) Measured with a 30 cm diameter shielding plate in the grid terminal plane.

(2) Conditions above 30 MHz, please consult Thales Electron Devices.

Cooling

Anode cooling	water		
Cooling water flow and pressure gradient	see cooling curves		
Cooling water inlet pressure	10	bar	max.
Water inlet temperature	35	°C	max.
Temperature at any point on tube envelope	220	°C	max.
Air flow on tube terminal side	2	m ³ /mn	

Typical operation (3)

Class C RF oscillator for industrial applications

Examples	1	2	
Frequency	< 30	< 30	MHz
Anode voltage	12	10	kV
Control grid bias	- 350	- 450	V
RF control grid voltage	855	940	V
Anode current	12	10.3	A
Control grid current	3.7	3.55	A
Anode input power	144	103	kW
Anode output power (4)	110	80	kW
Anode dissipation	31	20	kW
Control grid dissipation	1.6	1.5	kW
Grid resistance	95	127	Ω
Feedback ratio	7.8	10.3	%
Oscillator efficiency	76.3	77.5	%


(3) Operation with higher frequencies on request.

(4) Without taking circuit losses into account.

Nota: Data sheets are for information only. For design purpose, please ask for our latest specification.

Cooling water curves:



P_a : anode dissipation
 Δp : pressure drop
 q : water flow rate
 T_{out} : water outlet temperature

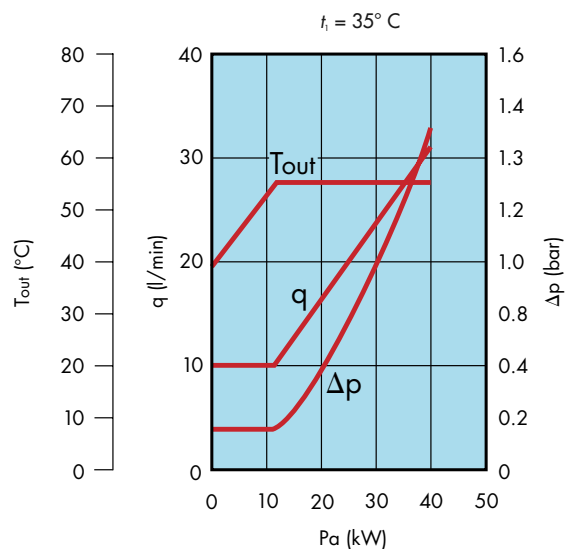

RS 3061 CJ

Constant current characteristics

Outline drawing (mm)

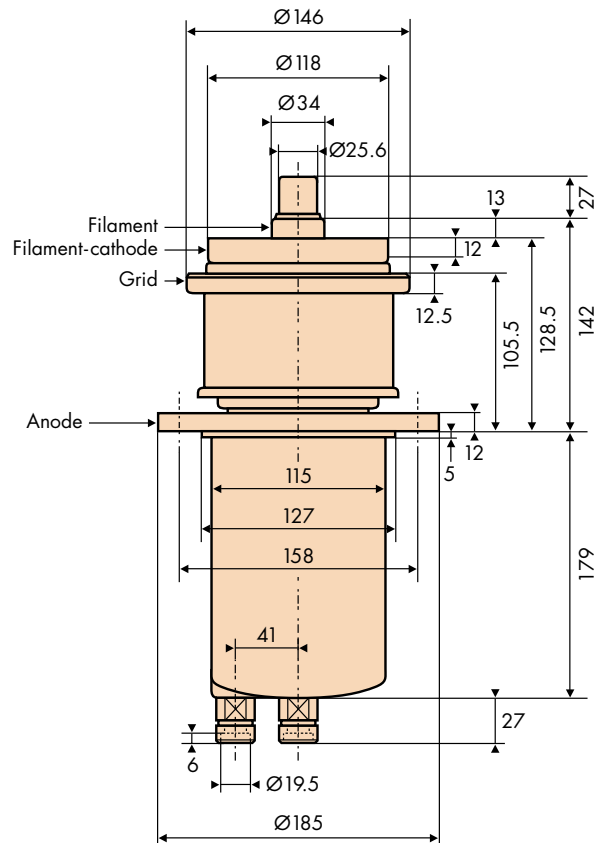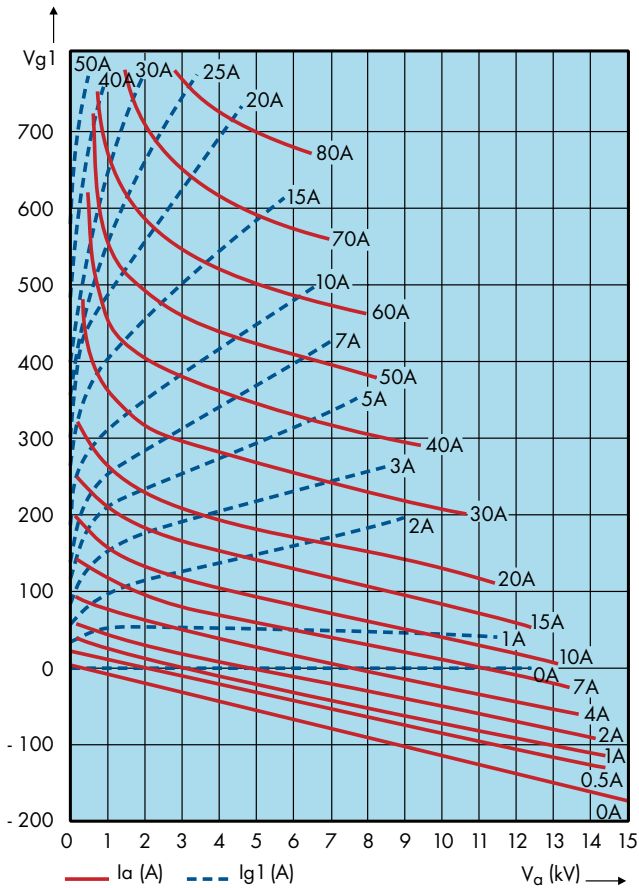

This document cannot be considered to be a contractual specification. The information given herein may be modified without notice due to product improvement or further development. Consult Thales Electron Devices before making use of this information for equipment design.

For further information, please contact:

THALES ELECTRON DEVICES

2 bis, rue Latécoère - 78941 Vélizy Cedex - France
 Tel: + 33 1 30 70 35 00 - Fax: + 33 1 30 70 35 35
www.thalesgroup.com/electrondevices